FILL & VAPOR LOCKDOWN CLAMP

SPECIFICATIONS:

- **CASTING:** HEAVY DUCTILE IRON.
- **PLATING:** HEAVY ZINC.
- **ADAPTOR IS SLOTTED TO MOTE WITH CLAMP.**

FEATURES:

- STRENGTH - WILL HANDLE ALL THE EXTREME PRESSURE THAT THE TANK DRIVER CAN APPLY WITHOUT LOOSING THE ADAPTOR.
- INSTALLATION - CONTRACTOR FRIENDLY.
- REWARDS - NO CITATIONS, SHUTDOWNS OR PENALTIES.

INSTALLATION INSTRUCTIONS

1) REMOVE EXISTING ADAPTORS.
2) CUT A 1" WIDE X 1/4" DEEP NOTCH. (FIG. 1)
3) INSTALL THE NEW GASKET.
4) SCREW ADAPTOR ONTO RISER, HAND TIGHT.
5) WRAP HINGE LOCKING DEVICE.
6) LIFT LOCKING DEVICE UP AND ALIGN WITH NOTCH. THEN, TIGHTEN BOTH SCREWS.

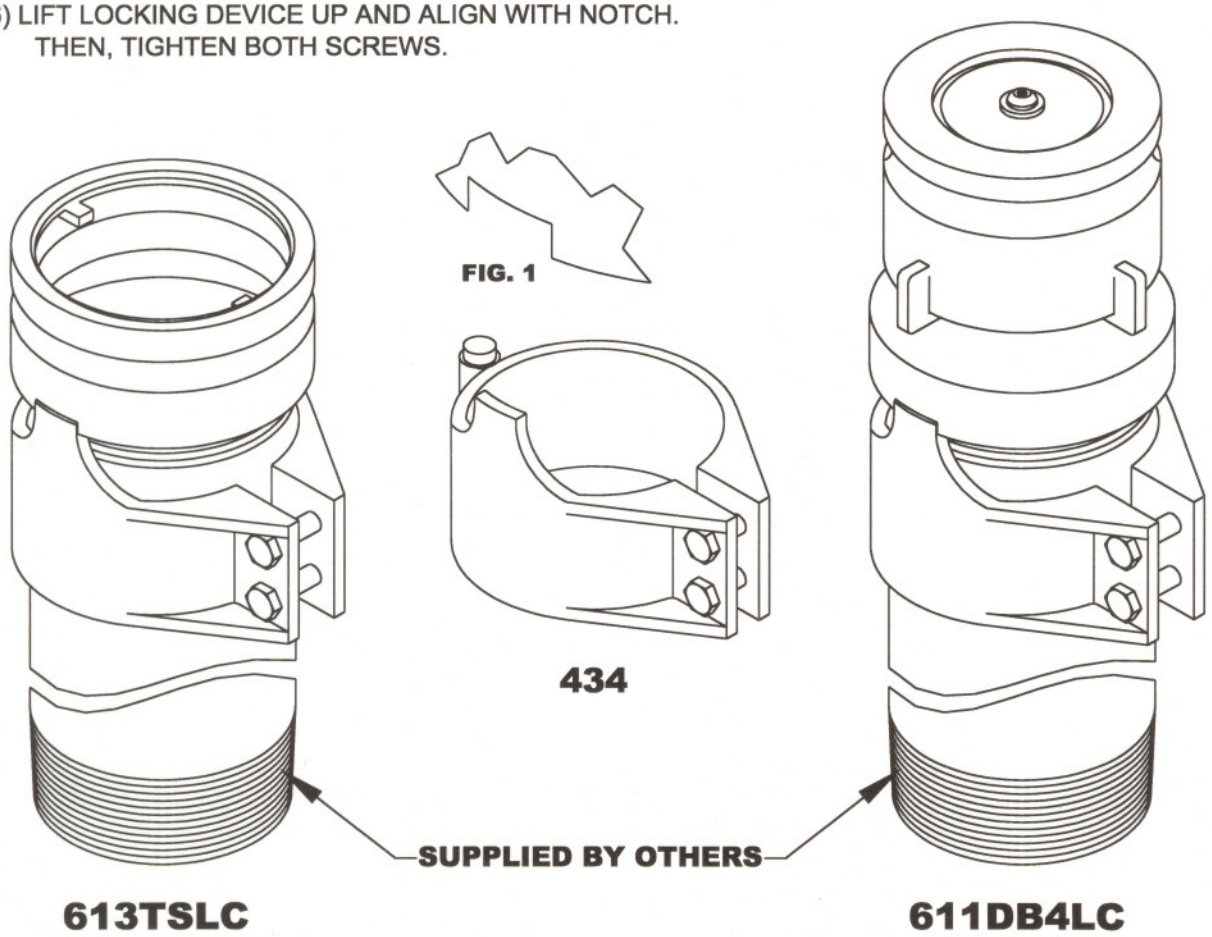

PART#	DESCRIPTION
434	LOCKING CLAMP
613TSALC	TOP SEAL ADAPTOR WITH CAP & LOCKING CLAM SHELL
611CALC	CUSTOMER SUPPLIED V/R ADAPTOR & LOCKING CLAM SHELL
611DB4LC	VAPOR ADAPTOR & LOCKING CLAM SHELL
611DB4CLC	VAPOR ADAPTOR WITH CAP & LOCKING CLAM SHELL